
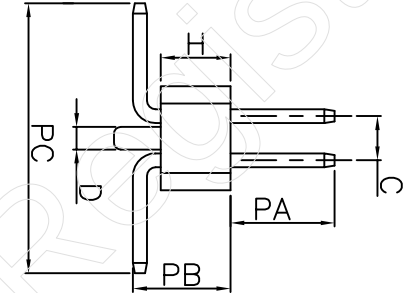
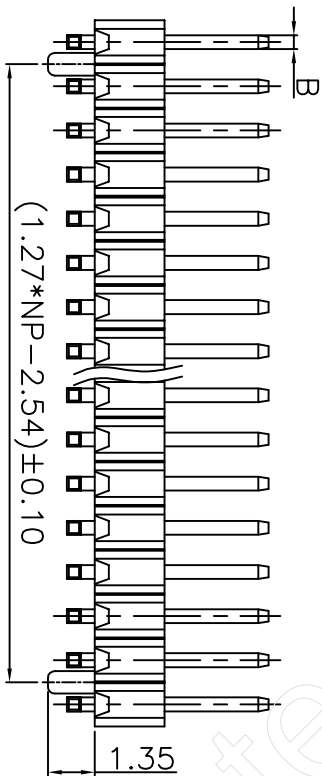


(1.27*NP)±0.30

(1.27*NP-1.27)±0.15


1.27±0.03

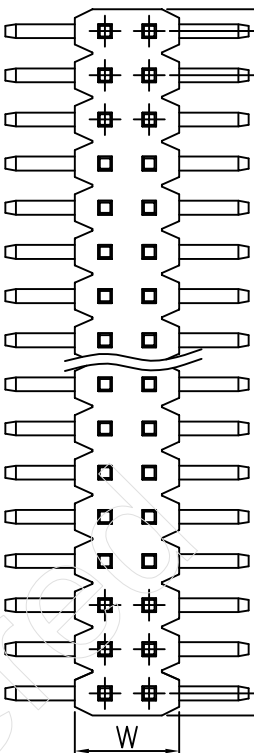

(1.27*NP-1.27)±0.10

1.27

1.50

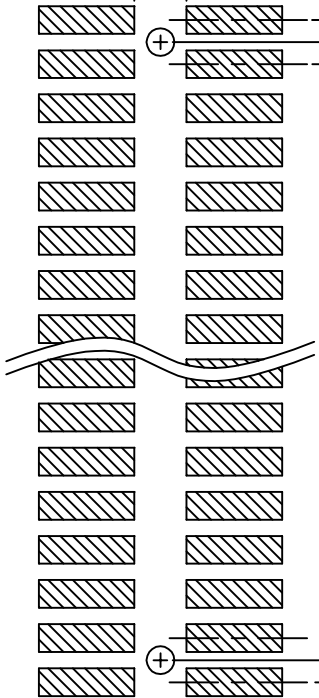

PCB LAYOUT

版本	变更	说明	日期	签名
A	编号	NEW	12.07.09	Zeng_qc

Specifications

- Current Ratings: 2Amps
- Insulation Resistance: 5000 MΩ min.
- Dielectric withstanding Voltage: AC 500V
- Contact Resistance: 30 mΩ max.
- Operating Temperature: -40°C to +105°C
- Contact Material: Copper Clad Steel
- Insulation Material: As follows
- Plated: As follows

H	W	B	C	D
2.54	4.30			
2.00	3.00			
1.70	3.00			
1.60	3.00	0.40/0.46	1.27/2.54	0.65/0.75
1.50	3.00/3.40			
1.00	3.40/5.00			
0.65	3.00			

深圳市永连旺电子有限公司

品名	材料	文件编号	比例	单位	mm	核	图	页码	尺码
排针PHL 27 双排 2XNP 弯四槽 SMT系列			1:1						A4