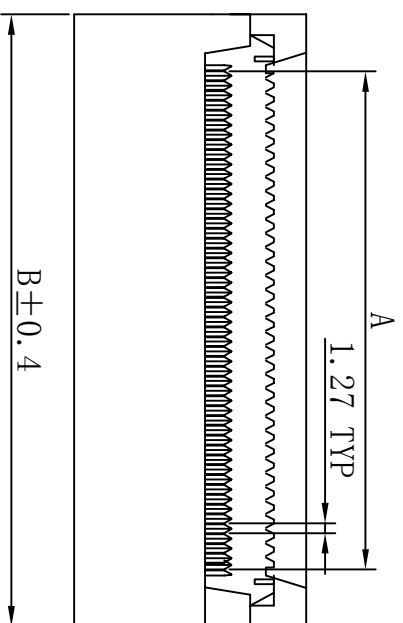

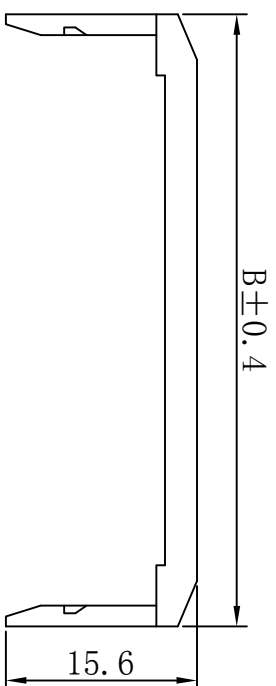



SPECIFICATION

Storage temperature: 20-70° C
Operating Temperature: 0-85° C
Contact Resistance: 10m max (initial)
Insulation Resistance: 1,000M min.
Dielectric Withstanding Voltage: AC
1,000V per minute
Insulator: Thermoplastic (UL 94V-0)
Color: See ordering intomation
Contact: Copper Alloy
Contact Plated: See ordering intomation

NO	OF	POS	A	B	C
10			11.43	22.22	10.16
14			16.51	27.30	15.24
16			19.05	29.80	17.78
20			24.13	34.92	22.86
26			31.75	42.54	30.48
34			41.91	52.70	40.64
40			49.53	60.32	48.26
44			54.61	65.40	53.34
50			62.63	73.02	60.96
60			74.93	85.70	73.66
64			80.01	90.80	78.74

IDC SOCKET PITCH2.54mm

Customer:	Approval:	Unit	Scale	Date
Drawing No:	Check:	mm		02.04.22



P/NO:
Pin Longer:
Signatuer:

深圳市永连旺电子有限公司