
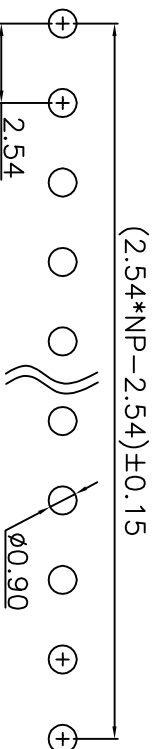

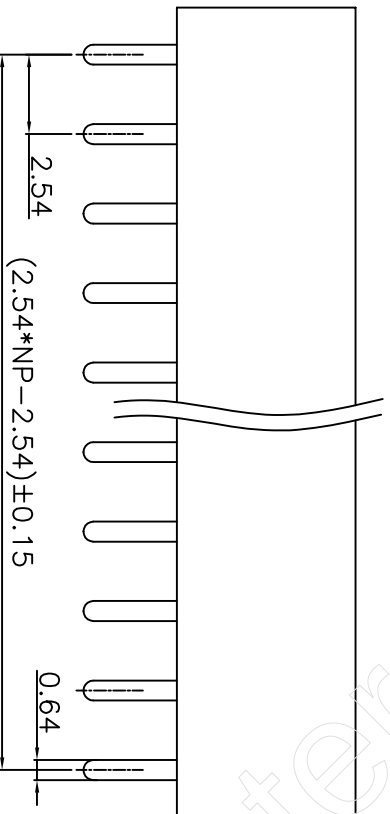


6	7	8	9
版本号	说明	日期	签名
A	NEW	12.08.08	Zeng_qc

Specifications

1. Current Rating: 1amps
2. Insulation Resistance: 1000 M Ω min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 m Ω max.
5. Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

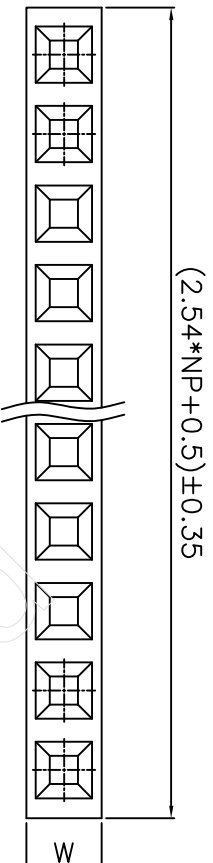

PCB LAYOUT

公差标准		尺寸
线性	角度	
0	± 0.25	0° $\pm 3^{\circ}$
0.00	± 0.20	0° $\pm 2^{\circ}$
0.000	± 0.10	0.00° $\pm 1^{\circ}$

深圳市永连旺电子有限公司									
品名	PH12.54*H 1*NP 180° U型单排排母			制	图				
料号				审	核				
文件编号				核	准				
比例	1:1	单位	mm			页码	2/3	尺码	A4